

## IPitomy IP1000 Upgrade Procedures

\*Always perform a database backup before updating the PBX.

### Backup The Database

1. Login to the PBX




User Name:

Password:

[Go to User Login](#)

2. Go to PBX > Setup > Database

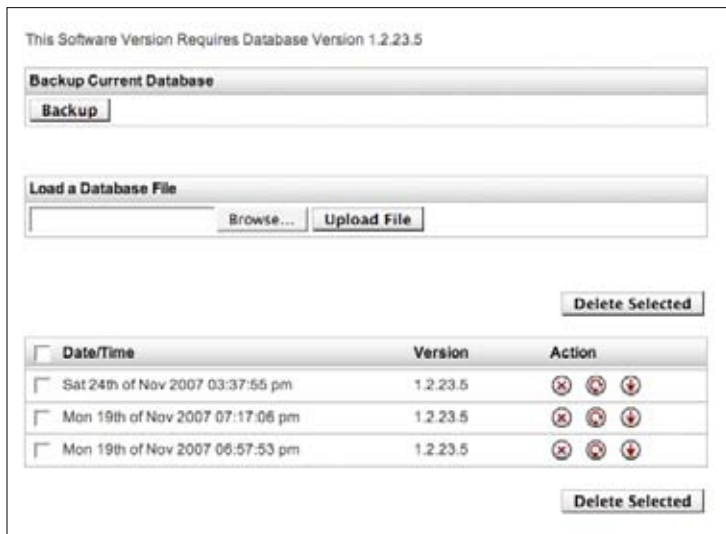

This Software Version Requires Database Version 1.2.23.5

**Backup Current Database**


**Load a Database File**

<input type="checkbox"/>	Date/Time	Version	Action
<input type="checkbox"/>	Sat 24th of Nov 2007 03:37:55 pm	1.2.23.5	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/>	Mon 19th of Nov 2007 07:17:06 pm	1.2.23.5	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/>	Mon 19th of Nov 2007 06:57:53 pm	1.2.23.5	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

3. Click Backup
4. Find the database with the proper date (time will be off) and click the down arrow to the right – save the database on your hard drive.

## Upgrade The Firmware

1. Go to Networking > Administration > Firmware Upgrade

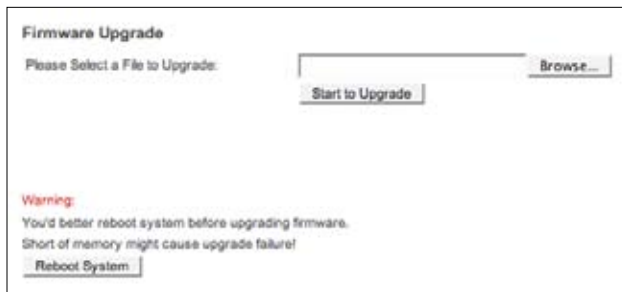

2. Click on Browse and upload file ip1000\_(version#).bin
3. Click Start to Upgrade

## Upgrade Data Storage Files

1. After reboot log back into the PBX
2. Go to PBX Setup > Services



3. Under Storage Data Loader click browse and upload file usb\_(version#).tgz
4. Click Load

## Restoring Database

1. After Reboot log back into the PBX
2. Go to PBX Setup > Database
3. Your backup should still be there (if not Click Browse and navigate to where you downloaded your backup and click Upload File)
4. Click the Restore Button to the right of the back up database file
5. Click OK on the alert box. (all network settings will be restored from the database).
6. System will reboot and after logged back in everything will be back to the systems custom configurations.