


IPitomy IP1500 Upgrade Procedures

*Always perform a database backup before updating the PBX.

Backup The Database

1. Login to the PBX




User Name:

Password:

[Go to User Login](#)

2. Go to PBX > Setup > Database

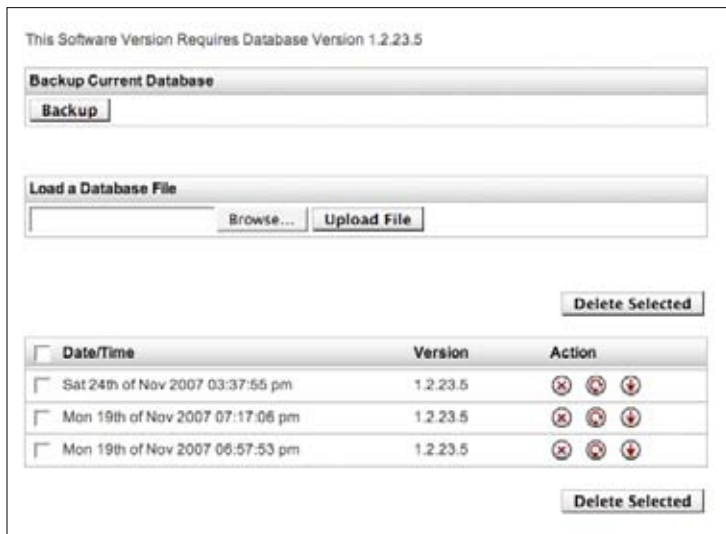

This Software Version Requires Database Version 1.2.23.5

Backup Current Database

Load a Database File

<input type="checkbox"/>	Date/Time	Version	Action
<input type="checkbox"/>	Sat 24th of Nov 2007 03:37:55 pm	1.2.23.5	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/>	Mon 19th of Nov 2007 07:17:06 pm	1.2.23.5	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>
<input type="checkbox"/>	Mon 19th of Nov 2007 06:57:53 pm	1.2.23.5	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

3. Click Backup
4. Find the database with the proper date and click the down arrow to the right – save the database on your hard drive.

Loading The Upgrade File

1. PBX Setup > Services



2. Click on Browse and upload file ipitomy_pbx_(build#).tgz
3. Click Load File to start the upgrade process.

Restoring Database

1. After Reboot log back into the PBX
2. Go to PBX Setup > Database
3. Your backup should still be there (if not Click Browse and navigate to where you downloaded your backup and click Upload File)
4. Click the Restore Button to the right of the back up database file
5. On the Alert Box choose OK or cancel according to what you want your network settings to be.
6. Go to PBX Setup > Services and click on Reboot, wait for the system to restart and log back in. Press Apply Changes and all settings will be restored and the update has been installed.

